


## Horizontal Bus End to Ground Rod (BR-AH)

### Application:

BR-AR type moulds are used to connect horizontal bus bars end to end of an earth rod. Ground rods can be copperbonded, copperclad, galvanized, stainless steel or stainless steel clad.

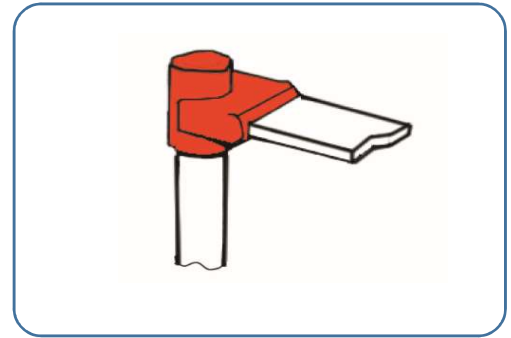

Reference Code	Cable Section (mm <sup>2</sup> )		Cartridge Size	Handle Clamp Type
	Main	Tap		
BR-AH 20x3/14.2	14.2	20x3	90	NHC-50
BR-AH 25x3/14.2	14.2	25x3	90	NHC-50
BR-AH 30x3/14.2	14.2	30x3	115	NHC-80
BR-AH 30x5/14.2	14.2	30x5	150	NHC-80
BR-AH 50x5/14.2	14.2	50x5	200	NHC-80
BR-AH 20x3/17.2	17.2	20x3	115	NHC-80
BR-AH 25x3/17.2	17.2	25x3	150	NHC-80
BR-AH 30x3/17.2	17.2	30x3	150	NHC-80
BR-AH 30x5/17.2	17.2	30x5	200	NHC-80
BR-AH 50x5/17.2	17.2	50x5	300	NHC-80

### Required Tools:

**Suitable Mould Type: (BR-AH)**  
**Handle Clamps (NHC)**  
**Exothermic Welding Powder**  
**Wick Starter**  
**Metalic Disk**  
**Flint Ignitor**

### Suggested Tools:

**Cleaning Tools (CTKA)**  
**Torch Warmer (TFG)**  
**Scraper**

Titel:	Document No.:						
<b>Horizontal Bus End to Ground Rod (BR-AH)</b>	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved