


Horizontal Bus to Horizontal Cable (CB-T)

Application:

CB-T type moulds are used to connect horizontal copper bus bar, flat side horizontal, to a horizontal through run cable.

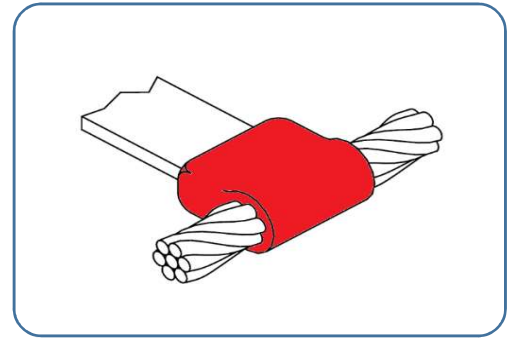

Reference Code	Cable Section (mm ²)		Cartridge Size	Handle Clamp Type
	Main	Tap		
CB-T 35/20x3	35	20x3	45	NHC-50
CB-T 35/25x3	35	25x3	65	NHC-50
CB-T 50/20x3	50	20x3	65	NHC-50
CB-T 50/25x3	50	25x3	65	NHC-50
CB-T 70/25x3	70	25x3	90	NHC-50
CB-T 70/30x3	70	30x3	115	NHC-50
CB-T 95/30x3	95	30x3	150	NHC-80
CB-T 95/30x5	95	30x5	150	NHC-80
CB-T 120/30x5	120	30x5	150	NHC-80
CB-T 120/50x5	120	50x5	250	NHC-80
CB-T 150/30x5	150	30x5	200	NHC-80
CB-T 150/50x5	150	50x5	300	NHC-80
CB-T 185/30x5	185	30x5	250	NHC-80
CB-T 185/50x5	185	50x5	300	NHC-80
CB-T 240/30x5	240	30x5	250	NHC-80
CB-T 240/50x5	240	50x5	300	NHC-80

Required Tools:

Suitable Mould Type: (CB-T)
Handle Clamps (NHC)
Exothermic Welding Powder
Wick Starter
Metalic Disk
Flint Ignitor

Suggested Tools:

Cleaning Tools (CTKA)
Torch Warmer (TFG)
Scraper

Titel:	Document No.:						
Horizontal Bus to Horizontal Cable (CB-T)	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved