


## Cast resin cable jointing kits


All types of jointing kit contain:

- Impact resistant polycarbonate casting mould
- Hydrolysis resistant polyurethane resin (ready for mixing)
- Cap
- Spacers
- PVC tape
- Assembly instructions

**"Y" or Shape Type:**

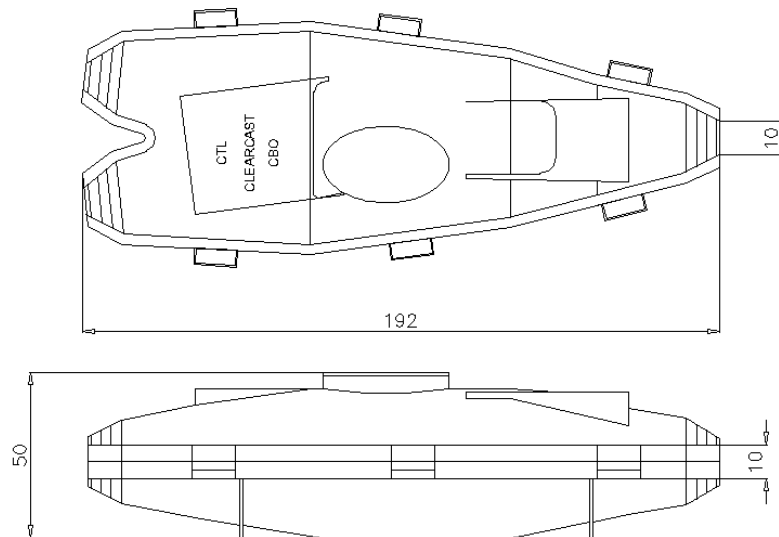

**Straight through type:**

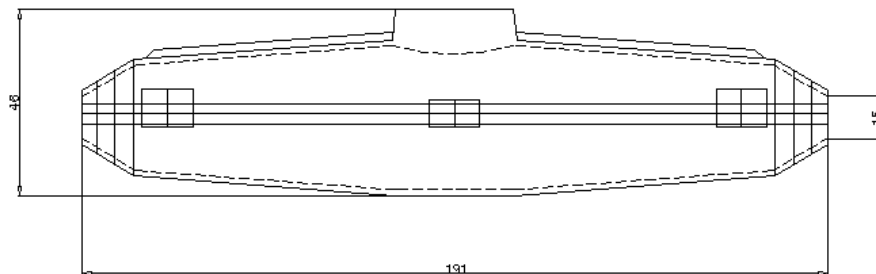

### Resin Properties:

Standard halogen free polyurethane resin is suitable for low voltage cables with PVC, PE, and XLPE & EPR insulation rated up to 1kV.

Technical data	Value
Processing time of 180 ml mixture at 5°C	40min
23°C	20min
35°C	15min
Operating temperature range	-40°C to +100°C
Open cup flash point	> 200°C
Density	1.3 g/cm <sup>3</sup>
Impact strength	> 10kJ/m <sup>2</sup>
Shelf life	24 Months at 15°C to 35°C