


Cable To Ground Rod Connection (CR-T)

Section 2

Application:

CR-T Type Molds are used to join horizontal through copper cable to the top of a vertical ground rod. Through cable to top of ground rod.

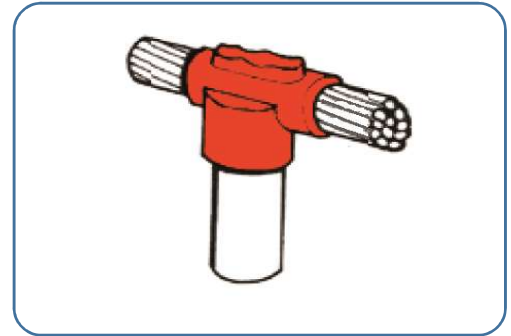

Reference Code	Cable Section (mm ²)		Cartridge Size	Handle Clamp Type
	Main	Tap		
CR-T 17.2/35	17.2	35	90	NHC-50
CR-T 17.2/50	17.2	50	90	NHC-80
CR-T 17.2/70	17.2	70	115	NHC-80
CR-T 17.2/95	17.2	95	115	NHC-80
CR-T 17.2/120	17.2	120	150	NHC-80
CR-T 17.2/150	17.2	150	200	NHC-80
CR-T 17.2/185	17.2	185	200	NHC-80
CR-T 17.2/240	17.2	240	250	NHC-80
CR-T 17.2/300	17.2	300	300	NHC-80
CR-T 20/35	20	35	90	NHC-50
CR-T 20/50	20	50	90	NHC-80
CR-T 20/70	20	70	115	NHC-80
CR-T 20/95	20	95	115	NHC-80
CR-T 20/120	20	120	150	NHC-80
CR-T 20/150	20	150	200	NHC-80
CR-T 20/185	20	185	200	NHC-80
CR-T 20/240	20	240	250	NHC-80
CR-T 20/300	20	300	300	NHC-80

Required Tools:

- Suitable Mould Type: (CR-T)
- Handle Clamps (NHC)
- Exothermic Welding Powder
- Wick Starter
- Metalic Disk
- Flint Ignitor

Suggested Tools:

- Cleaning Tools (CTKA)
- Torch Warmer (TFG)
- Scraper

Titel:	Document No.:						
Cable To Ground Rod Connection (CR-T)	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved