


Copper Wire Change Sleeve (SQ)

Application:

These Sleeves are in a variety of configurations for a multitude of applications. These Sleeves can be used for changing the size of wire to make adjusted the wire for a hole size of a mould.

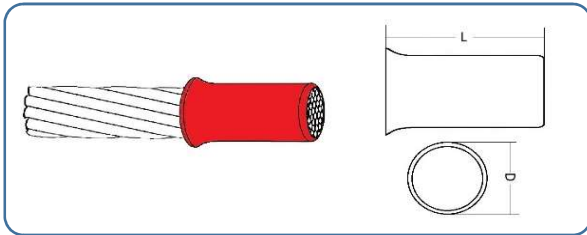

Specification:

Copper crimp connector for use with solid and stranded copper wire.

They are made of pure copper.

Reference Code	Cable Section (mm ²)		Dimention (mm)		Box. Qty	Unit Weight (Kg)
	Main	Tap	ø	L		
SQ 16/25	16	25	7.3	20.0	10	0.01
SQ 16/35	16	35	8.5	20.0	10	0.01
SQ 16/50	16	50	10	20.0	10	0.01
SQ 16/70	16	70	11.5	20.0	10	0.01
SQ 16/95	16	95	13.5	25.0	10	0.01
SQ 16/120	16	120	15	25.0	10	0.02
SQ 25/35	25	35	8.5	20.0	10	0.02
SQ 25/50	25	50	10	20.0	10	0.06
SQ 25/70	25	70	11.5	20.0	10	0.10
SQ 25/95	25	95	13.5	25.0	10	0.20
SQ 25/120	25	120	15	25.0	10	0.27
SQ 35/50	35	50	10	20.0	10	0.03
SQ 35/70	35	70	11.5	20.0	10	0.08
SQ 35/95	35	95	13.5	25.0	10	0.17
SQ 35/120	35	120	15	25.0	10	0.24
SQ 50/70	50	70	11.5	20.0	10	0.04
SQ 50/95	50	95	13.5	25.0	10	0.13
SQ 50/120	50	120	15	25.0	10	0.20

Reference Code	Cable Section (mm ²)		Dimention (mm)		Box. Qty	Unit Weight (Kg)
	Main	Tap	ø	L		
SQ 70/95	70	95	13.5	25.0	10	0.08
SQ 70/120	70	120	15	25.0	10	0.15
SQ 70/150	70	150	16.7	25.0	10	0.24
SQ 70/185	70	185	18.5	25.0	10	0.34
SQ 70/240	70	240	21.2	25.0	10	0.52
SQ 95/120	95	120	15	25.0	10	0.07
SQ 95/150	95	150	16.7	25.0	10	0.16
SQ 95/185	95	185	18.5	25.0	10	0.26
SQ 95/240	95	240	21.2	25.0	10	0.44
SQ 120/150	120	150	16.7	25.0	10	0.09
SQ 120/185	120	185	18.5	25.0	10	0.19
SQ 120/240	120	240	21.2	25.0	10	0.37
SQ 150/185	150	185	18.5	25.0	10	0.10
SQ 150/240	150	240	21.2	25.0	10	0.28
SQ 150/300	150	300	23.5	30.0	10	0.54
SQ 185/240	185	240	21.2	25.0	10	0.18
SQ 185/300	185	300	23.5	30.0	10	0.42
SQ 240/300	240	300	23.5	30.0	10	0.21

Titel:	Document No.:					
Copper Wire Change Sleeve (SQ)	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked
						Approved