


Horizontal Cable Tap to Horizontal Bus (CBS-H)

Application:

CBS-H type moulds are used to connect horizontal copper cable tap to a horizontal copper bus bar with the flat side horizontal.

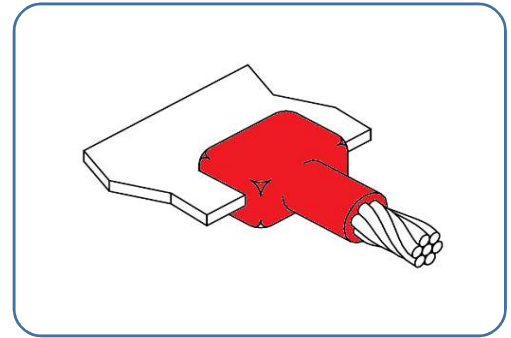

Reference Code	Cable Section (mm ²)		Cartridge Size	Handle Clamp Type
	Main	Tap		
CBS-H 3/35	35	3	45	NHC-50
CBS-H 3/50	50	3	45	NHC-50
CBS-H 3/70	70	3	65	NHC-50
CBS-H 3/95	95	3	90	NHC-50
CBS-H 3/120	120	3	90	NHC-50
CBS-H 5/35	35	5	65	NHC-50
CBS-H 5/50	50	5	65	NHC-50
CBS-H 5/70	70	5	90	NHC-50
CBS-H 5/95	95	5	90	NHC-50
CBS-H 5/120	120	5	90	NHC-80
CBS-H 5/150	150	5	115	NHC-80
CBS-H 5/185	185	5	150	NHC-80
CBS-H 5/240	240	5	200	NHC-80

Required Tools:

Suitable Mould Type: (CBS-H)
Handle Clamps (NHC)
Exothermic Welding Powder
Wick Starter
Metalic Disk
Flint Ignitor

Suggested Tools:

Cleaning Tools (CTKA)
Torch Warmer (TFG)
Scraper

Titel:	Document No.:						
Horizontal Cable Tap to Horizontal Bus (CBS-H)	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved