


## Horizontal End to End Connection (CC-E)

### Application:

CC-E Type Molds are used for horizontal butt splice stranded cable connections. Also available are splices of different and mixed cable sizes.

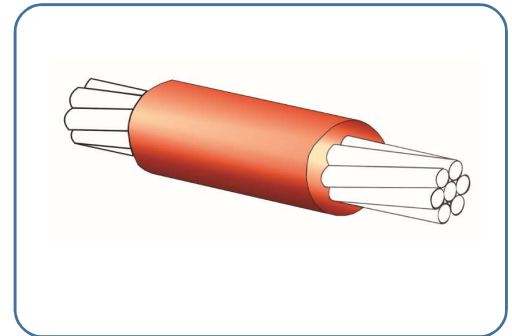

Reference Code	Cable Section (mm <sup>2</sup> )		Cartridge Size	Handle Clamp Type
	Main	Tap		
CC-E 16/16	16	16	32	NHC-50
CC-E 25/25	25	25	32	NHC-50
CC-E 35/35	35	35	32	NHC-50
CC-E 50/50	50	50	45	NHC-50
CC-E 70/70	70	70	65	NHC-50
CC-E 95/95	95	95	90	NHC-50
CC-E 120/120	120	120	115	NHC-80
CC-E 150/150	150	150	115	NHC-80
CC-E 185/185	185	185	150	NHC-80
CC-E 240/240	240	240	200	NHC-80
CC-E 300/300	300	300	250	NHC-80

### Required Tools:

Suitable Mould Type: (CC-E)  
Handle Clamps (NHC)  
Exothermic Welding Powder  
Wick Starter  
Metalic Disk  
Flint Ignitor

### Suggested Tools:

Cleaning Tools (CTKA)  
Torch Warmer (TFG)  
Scraper

Titel:	Document No.:						
<b>Horizontal End to End Connection (CC-E)</b>	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved