


Horizontal Cable Cross Connection (CC-XS)

Application:

CC-X Type Moulds are used for horizontal cross stranded cable connections. Cross of horizontal cables, lapped and not cut.

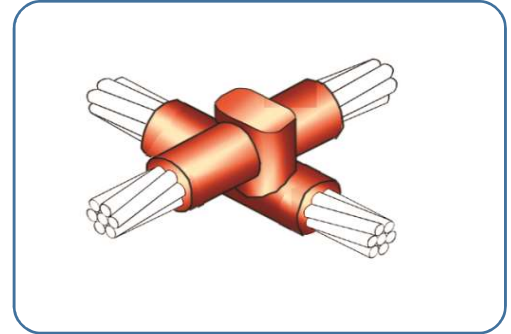

Reference Code	Cable Section (mm ²)		Cartridge Size	Handle Clamp Type
	Main	Tap		
CC-XS 50/50	50	50	150	NHC-80
CC-XS 70/50	70	50	150	NHC-80
CC-XS 70/70	70	70	150	NHC-80
CC-XS 95/70	95	70	200	NHC-80
CC-XS 95/95	95	95	250	NHC-80
CC-XS 120/70	120	70	250	NHC-80
CC-XS 120/95	120	95	250	NHC-80
CC-XS 120/120	120	120	300	NHC-80
CC-XS 150/95	150	95	300	NHC-80
CC-XS 150/120	150	120	300	NHC-80
CC-XS 150/150	150	150	400	NHC-80
CC-XS 185/120	185	120	300	NHC-80
CC-XS 185/150	185	150	400	NHC-80
CC-XS 185/185	185	185	400	NHC-80
CC-XS 240/120	240	120	400	NHC-80
CC-XS 240/150	240	150	400	NHC-80
CC-XS 240/185	240	185	500	NHC-100
CC-XS 240/240	240	240	500	NHC-100
CC-XS 300/150	300	150	500	NHC-100
CC-XS 300/185	300	185	500	NHC-100
CC-XS 300/240	300	240	600	NHC-100
CC-XS 300/300	300	300	600	NHC-100

Required Tools:

Suitable Mould Type: (CC-XS)
Handle Clamps (NHC)
Exothermic Welding Powder
Wick Starter
Metalic Disk
Flint Ignitor

Suggested Tools:

Cleaning Tools (CTKA)
Torch Warmer (TFG)
Scraper

Titel:	Document No.:						
Horizontal Cable Cross Connection (CC-XS)	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved