


"C" Crimp Type Connector Clamp (CC)

Application:

"C" clamps are used for connecting of two wire conductor. "C" Crimp Connectors will accept a range of stranded or solid circular conductors

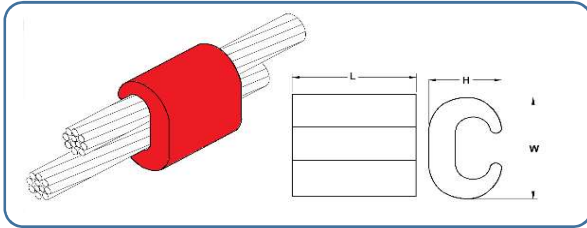

Specification:

"C" connector clamps are made from pure copper, corrosion resistance, high conductivity and support and passing electrical current.

Based on BS 7430, UL 467, IEC 62305, EN 50164, BS 6651, NFPA 780, UNE 21186 & NFC 17102

Reference code	Cable Range mm ²	T Code	Dimension (mm)	Box. Qty	Unit Weight (Kg)
CC 6/6	6	T11	6.2 x9.5x12	10	0.01
CC 10/6	6	T16	7.3 x11.8x13	10	0.02
CC 10/10	10	T20	9.7x12.8 x13	10	0.02
CC 16/6	6	T20	9.7x12.8 x13	10	0.02
CC 16/10	10	T26	10.9x14.7 x16	10	0.03
CC 16/16	16	T44	14.4 x19x20	5	0.04
CC 25/25	6-25	T44	14.4 x19x20	5	0.04
CC 35/10	6-10	T44	14.4 x19x20	5	0.04
CC 35/25	16-25	T60	15.1x21x22	5	0.07
CC 35/35	35	T76	17.6x24.4x22	5	0.09
CC 50/6	6	T60	15.1x21x22	5	0.07
CC 50/25	10-25	T76	17.6x24.4x22	5	0.09
CC 50/35	35	T98	18.1x27.8x25	5	0.10
CC 50/50	50	T122	21.2x29.8 x26	5	0.15
CC 70/10	6-10	T76	17.6x24.4x22	5	0.09
CC 70/25	16-25	T98	18.1x27.8x25	5	0.10
CC 70/50	35-50	T122	21.2x29.8 x26	5	0.15
CC 70/70	70	T154	24.2x34x28	5	0.17
CC 95/10	6-10	T98	18.1x27.8x25	5	0.10
CC 95/35	16-35	T122	21.2x29.8 x26	5	0.15
CC 95/70	50-70	T154	24.2x34x28	5	0.17

Reference code	Cable Range mm ²	T Code	Dimension (mm)	Box. Qty	Unit Weight (Kg)
CC 95/95	95	T190	25.4 x37x35	5	0.19
CC 120/25	6-25	T154	24.2x34x28	5	0.17
CC 120/50	35-50	T190	25.4 x37x35	5	0.19
CC 120/95	70-95	T240	28.5x40x40	1	0.20
CC 120/120	120	T288	31.1 x44.5x45	1	0.24
CC 150/35	6-35	T190	25.4 x37x35	5	0.19
CC 150/95	50-95	T240	28.5x40x40	1	0.20
CC 150/120	120	T288	31.1 x44.5x45	1	0.24
CC 150/150	150	T365	34x47.5x50	1	0.25
CC 185/10	6-10	T190	25.4 x37x35	5	0.19
CC 185/50	16-50	T240	28.5x40x40	1	0.20
CC 185/95	70-95	T288	31.1 x44.5x45	1	0.24
CC 185/185	120-185	T365	34x47.5x50	1	0.25
CC 240/35	6-35	T240	28.5x40x40	1	0.20
CC 240/95	50-95	T288	31.1 x44.5x45	1	0.24
CC 240/150	120-150	T365	34x47.5x50	1	0.25
CC 240/240	185-240	T450	41x57x60	1	0.27
CC 300/50	6-50	T365	34x47.5x50	1	0.25
CC 300/120	70-120	T450	41x57x60	1	0.27
CC 300/240	150-240	T560	45x62x65	1	0.28
CC 300/300	300	T700	49.5x68x70	1	0.64

Titel:	Document No.:						
"C" Crimp Type Connector Clamp (CC)	Rev.:	0	Issued For Approval	97/10/20	K. J.	M.R.Hedayati	M.R.Hedayati
	Page:	1/2	Description	Date	Prepared	Checked	Approved